

griffiths®



C Area, Level 3, Building 2, European Industrial Park,  
No.60, West Langbao Road, Foshan City,  
Guangdong Province, P.R.China



griffiths®



FLOOR : 6ATUCYM

SILVER

6ATUWHM  
600×600mm  
612ATUWHM  
600×1200mm

IVORY

6ATUBEM  
600×600mm  
612ATUBEM  
600×1200mm

SLATE GREY

6ATUCYM  
600×600mm  
612ATUCYM  
600×1200mm



SILVER

**6ATUWHM**  
600×600mm  
**612ATUWHM**  
600×1200mm



FLOOR : 6ATUWHM



## ACCESSORIES



6ATUWHM-M38



WALL : 6ATUWHM-M38

## ACCESSORIES



6ATUWHM-M24



WALL : 6ATUBEM-M24

## ACCESSORIES





IVORY

**6ATUBEM**  
600×600mm  
**612ATUBEM**  
600×1200mm



FLOOR/WALL : 6ATUBEM





## ACCESSORIES



6ATUBEM-M38




WALL : 6ATUBEM-M38

## ACCESSORIES



6ATUBEM-M24

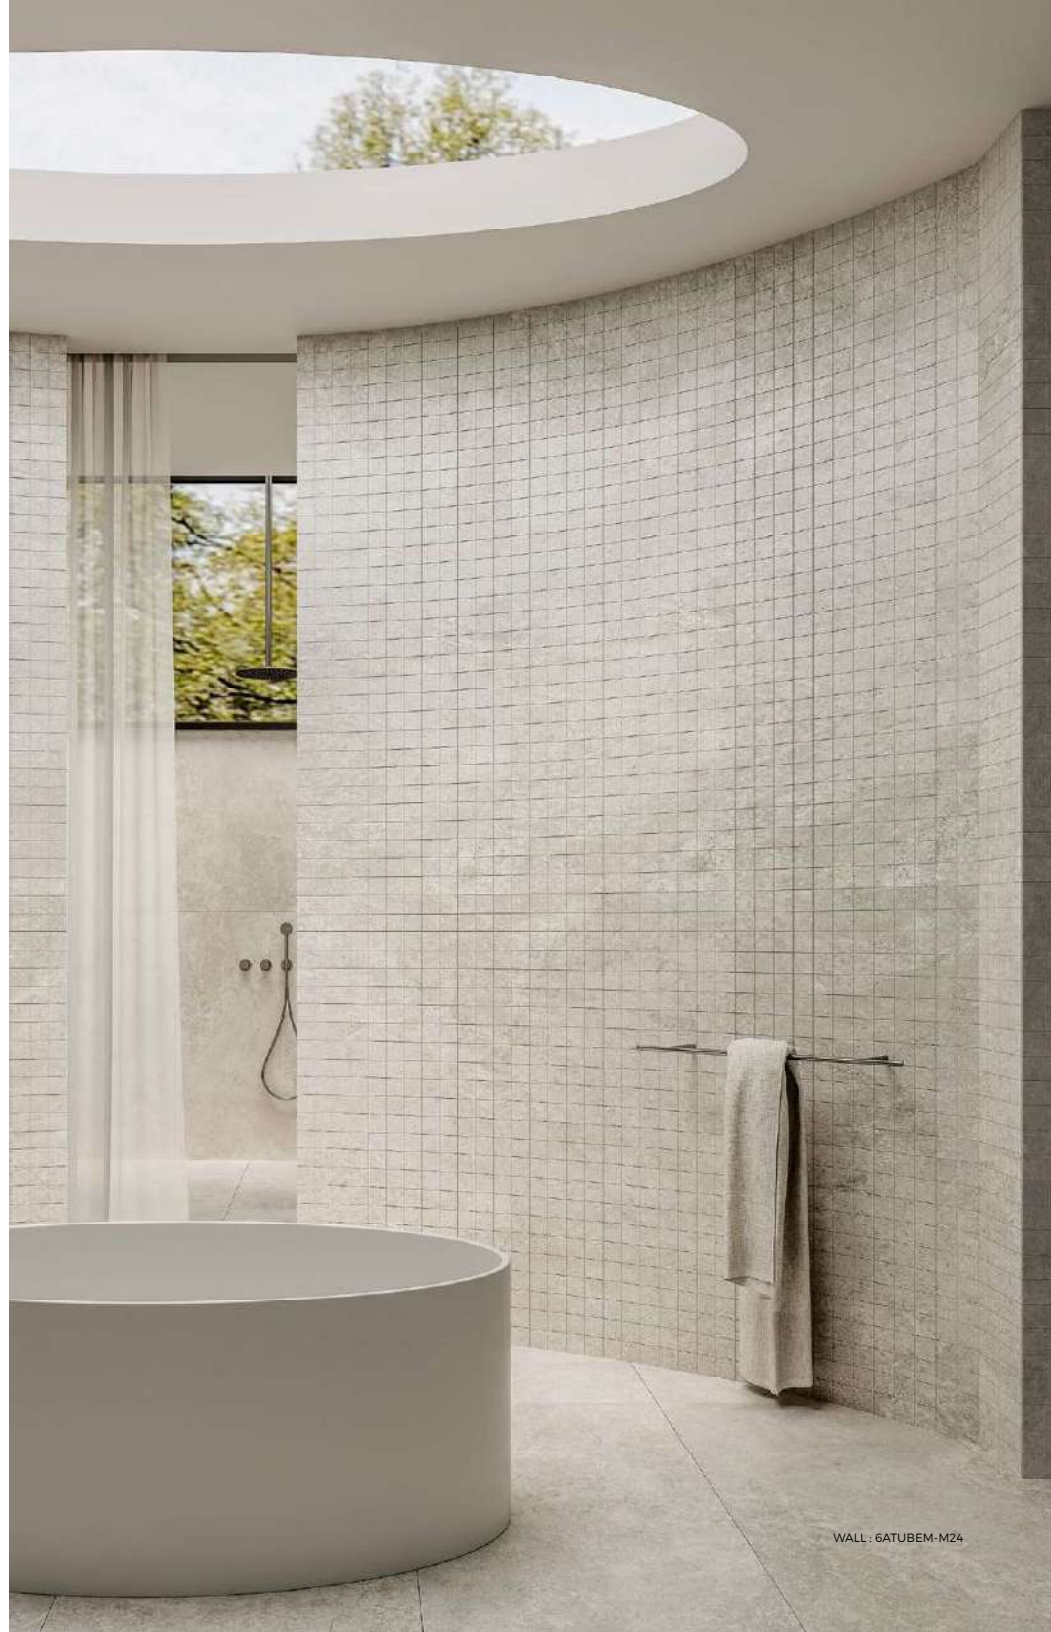

WALL : 6ATUBEM-M24

## ACCESSORIES





SLATE GREY

6ATUCYM  
600×600mm  
612ATUCYM  
600×1200mm



FLOOR/WALL : 612ATUCYM



## ACCESSORIES



6ATUCYM-M38



## ACCESSORIES




6ATUCYM-M24



WALL : 6ATUCYM-M24



## ACCESSORIES

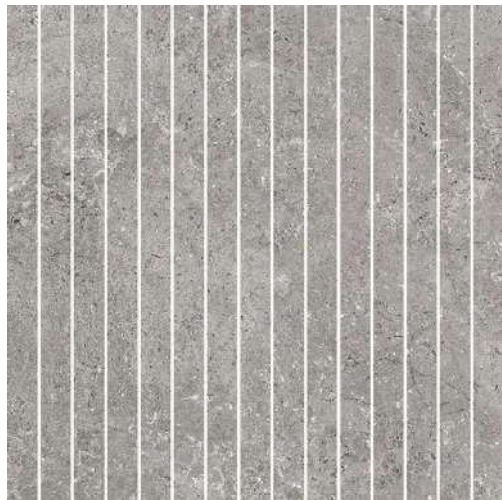


## ACCESSORIES




**PRODUCTFEATURE SURFACE APPLICATION INSTALLATION GUIDANCE**

- 12 THICKNESS
- RECTIFIED
- R STRUCTURE
- URD STRUCTURE
- WALL TILES
- FLOOR TILES
- MIN LAYING GAP 3mm
- 03 COLOURS
- 02 SIZES
- 02 SURFACES

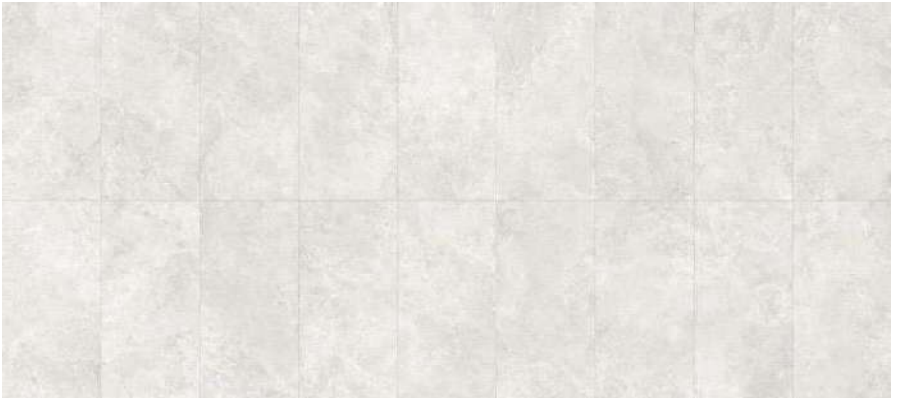

**PRODUCTFEATURE / SURFACE / APPLICATION / INSTALLATION GUIDANCE**

- V4 TEXTURE RATING
- MIN LAYING GAP 3mm
- RECTIFIED
- R STRUCTURE
- URD STRUCTURE
- WALL TILES
- FLOOR TILES
- 03 COLOURS
- 02 SIZES
- 02 SURFACES

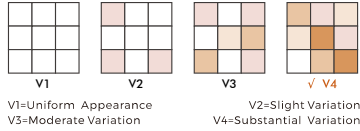

**TECHNICAL SPECIFICATION**

TECHNICAL FEATURES	STANDARD PRESCRIBED VALUES	MANUFACTURER'S VALUES (600x600mm)	MANUFACTURER'S VALUES (600x1200mm)
<b>Dimensions &amp; Surface Quality</b>			
Length and width	±0.6% max .	-0.03-0.03% max .	-0.03-0.03% max .
Thickness	±5% max .	9.0-9.5% max .	11.0-11.5% max .
Orthogonality	±0.5% max .	-0.06-0.07% max .	-0.06-0.07% max .
Straightness of sides	±0.5% max .	-0.06-0.07% max .	-0.02-0.03% max .
Surfaces flatness	±0.5% max .	-0.05-0.07% max .	-0.09-0.11% max .
<b>Physical Properties</b>			
Water absorption	≤ 0.5%	≤ 0.5%	≤ 0.5%
Breaking strength	≥ 1300N	2265N	4031N
Bending resistance	≥ 35N/mm <sup>2</sup>	38N/mm <sup>2</sup>	40N/mm <sup>2</sup>
Resistance to deep abrasion	≤ 175mm <sup>3</sup>	Class 4	Class 4
Temperature shock resistance	No visible crack	No visible crack	Durable
Resistance to frost	No visible crack	No visible crack	No visible crack
Non-slip	R9-R11	R11	R11
Colour resistance to light	no colour changes	no colour changes	no colour changes
<b>CHEMICAL PROPERTIES</b>			
Chemical resistance	no visible changes when subjected to chemicals	Durable	Durable
Resistance to staining	≥ 3	Class 5	Class 5

**PACKING DETAILS**

SIZE	SURFACE		PCS/CTN	m <sup>2</sup> /CTN	KG/CTN
	MATT	EXTERNAL			
600x600mm	√	√	4	1.44	32
600x1200mm	√		2	1.44	34

**COLOURS**



Silver  
6ATUWHM  
600x600mm



Ivory  
6ATUBEM  
600x600mm



Slate-Grey  
6ATUCYM  
600x600mm



Silver  
612ATUWHM  
600x1200mm



Ivory  
612ATUBEM  
600x1200mm



Slate-Grey  
612ATUCYM  
600x1200mm